

EC Centrifugal Fans

Backward Curved, $\Phi 175$

EC后向离心风机




Impeller: Plastic PP
Motor: EC brushless external rotor motor
Insulation: Class B
Approvals: CE;UL E306337
Operating Temperature: -20~+60°C
Technical Features: Control input 0-10VDC/PWM, tach output, Locked rotor protection, reverse polarity, Current limited, soft start

叶轮材质: 塑胶PP
 电机类型: EC无刷外转子电机
 绝缘等级: Class B
 产品符合的认证: CE;UL E306337
 工作温度: -20~+60°C
 技术特性: 调速输入0-10VDC/PWM, 调速信号输出, 堵转, 极性、限流保护, 软启动

技术参数 Specifications

Listed Model 产品型号	Rated Voltage	Operating Voltage	Rated Current	Rated Power	Rated Speed	Air Flow		Air Pressure		Noise Level	Net Weight
	额定电压	工作电压	额定电流	额定功率	额定转速	风量	风量	风压	风压	噪音	重量
Part NO.	VAC	VAC	A	W	RPM	CFM	m ³ /h	mmH ₂ O	inH ₂ O	dBA	Kg
PI1E17562HB2M	115	92~132	1.60	90.0	4,200	398.9	677.5	55.1	2.18	73.0	1.20
PI2E17562HB2M	230	184~265	1.00	118.0	4,500	427.3	725.9	63.2	2.49	75.0	1.20

外形 Outline

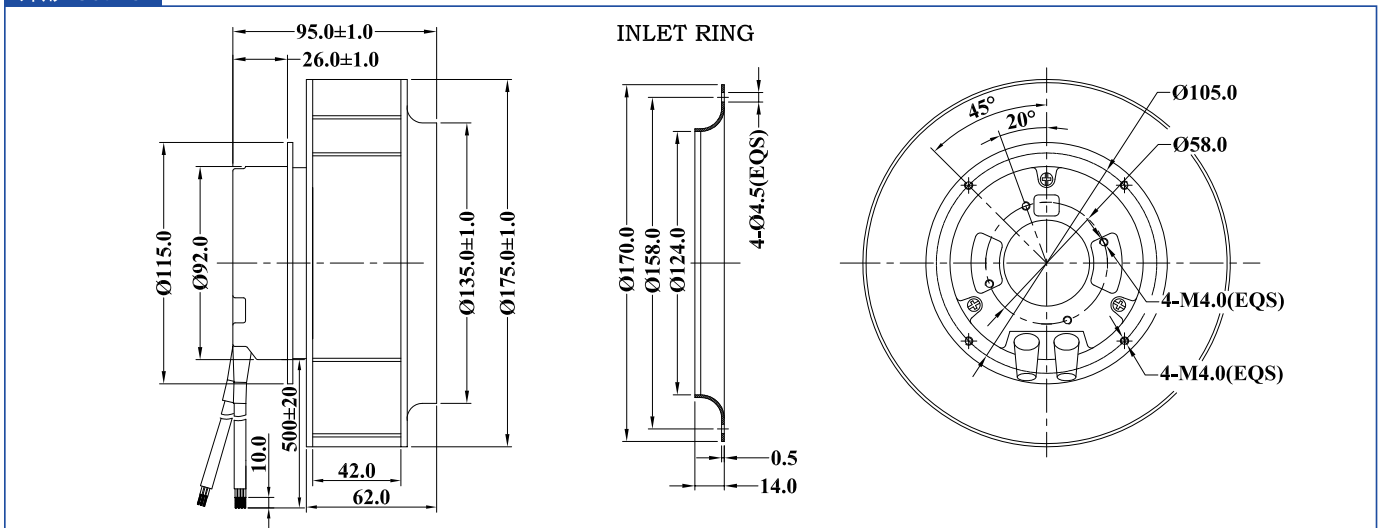

曲线 Curves

